

**DISCRPTION**


The Camlok series of screwcamclamps can be used on all structural steel plates and sections up to a surface hardness of 300 Brinell. They offer an easy way of attaching pulling equipment to steel structures and can be used for holding and for the correction of alignment problems. This range of clamps is designed for pulling in three planes.

**OPTION**

This series of clamps can be used in any combination or number of combinations required they are available in various sizes, lifting capacities and cap sizes.

**RESTRICTIONS**

The design allows for simultaneous loading in two directions but not for the transportation of plate.

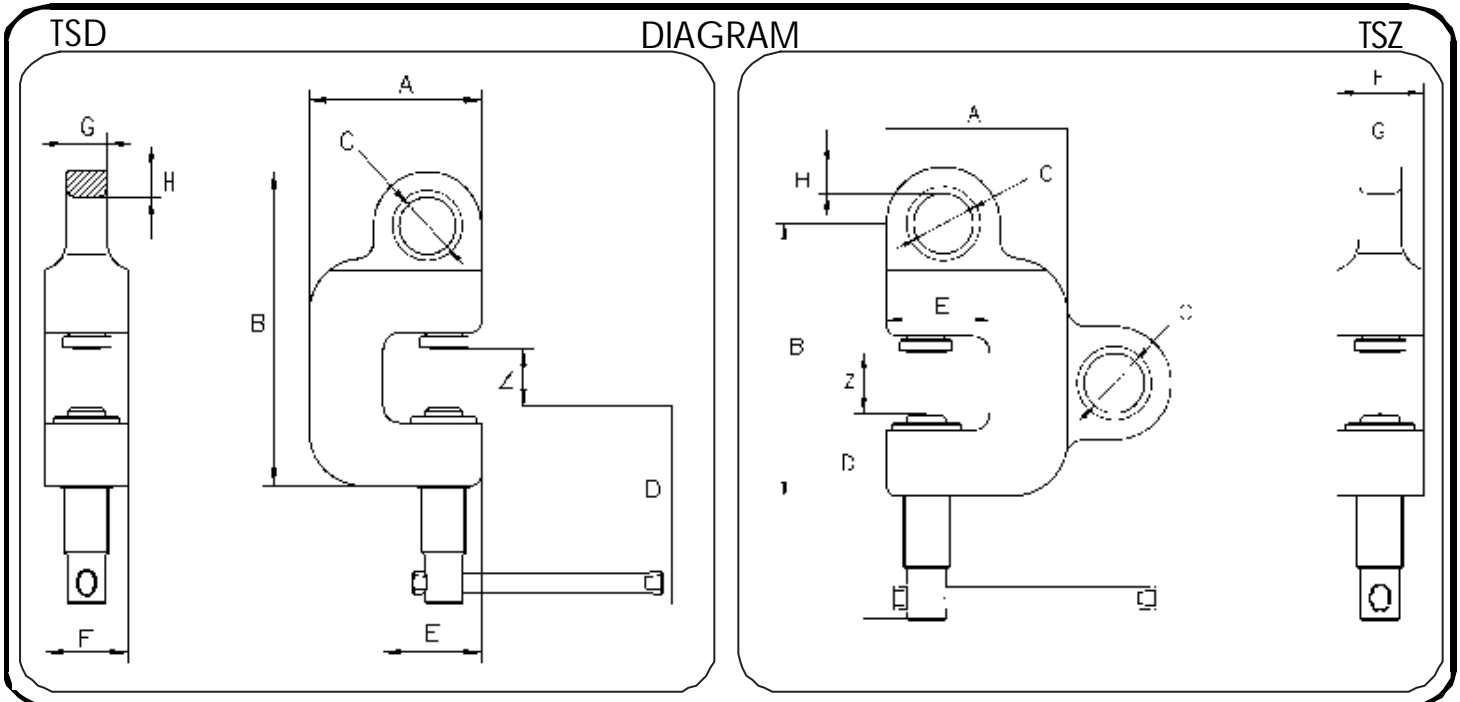

**TABLE**

	MODEL	WLL Tons	Jaw mm Z	weight kg	A	B	C	D	E	F	G	H
TSD	TSD 1,5	1,5	0 - 35	4	105	191	35	120	60	50	24	15,5
	TSD 3,0	3,0	0 - 35	6	120	235	46	120	67	60	34	17,0
	TSD 5,0	5,0	0 - 40	8	150	275	55	150	85	75	40	17,5
	TSD 7,0	7,5	0 - 40	13	162	295	65	150	92	80	50	22,0

	MODEL	WLL Tons	Jaw mm Z	Weight kg	A	B	C	D	E	F	G	H
TSZ	TSZ 5	5	0 - 28	2,6	83	125	26	95	43	35	16	12
	TS 1,5	1,5	0 - 35	5,4	99	158	35	120	60	50	24	16
	TSZ 3,0	3,0	0 - 35	9	120	195	46	120	67	60	34	17
	TSZ 5,0	5,0	0 - 40	16,4	150	230	55	150	85	75	40	18
	TSZ 7,0	7,5	0 - 40	20,8	162	240	65	150	92	80	50	23