



QUALITY RANGE
SMALL DEE SHACKLES
 TO BS 3032 - 1958 - TABLE 1
 TYPE 'A' SCREW PIN - TESTED AND CERTIFIED

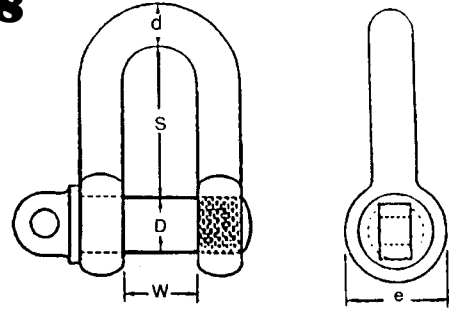

SWL TONS	d in	D in	W in	S in	e in	WEIGHT EACH KGS
0.30	1/4	3/8	3/8	7/8	3/4	0.06
0.60	3/8	1/2	5/8	1.3/8	1	0.15
1.00	1/2	5/8	7/8	1.7/8	1.1/4	0.33
1.75	5/8	3/4	1	2.1/4	1.1/2	0.61
2.50	3/4	7/8	1.1/4	2.3/4	1.3/4	0.93
3.50	7/8	1	1.3/8	3.1/4	2	1.80
4.50	1	1.1/8	1.1/2	3.5/8	2.1/4	2.15
5.50	1.1/8	1.1/4	1.3/4	4.1/8	2.1/2	3.02
7.00	1.1/4	1.3/8	1.7/8	4.1/2	2.3/4	4.20
8.00	1.3/8	1.1/2	2.1/8	5	3	5.34
10.75	1.1/2	1.3/4	2.3/8	5.1/2	3.1/2	8.36
13.00	1.5/8	1.7/8	2.1/2	5.7/8	3.3/4	9.35
14.75	1.3/4	2	2.3/4	6.3/8	4	12.39
16.75	1.7/8	2.1/8	2.7/8	6.3/4	4.1/4	15.30
19.00	2	2.1/4	3	7.1/4	4.1/2	18.40

ECONOMY RANGE
SMALL DEE SHACKLES
 GENERALLY TO BS 3032 - 1958 - TABLE 1
 TYPE 'A' SCREW PIN - TESTED AND CERTIFIED

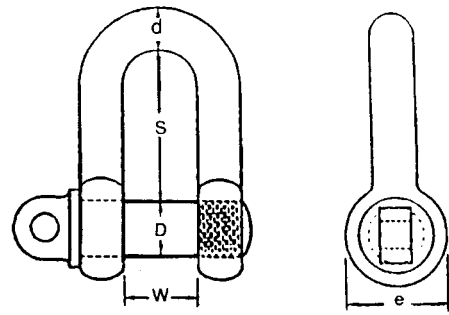

SWL TONS	d in	D in	W in	S in	e in	WEIGHT EACH KGS
0.60	3/8	1/2	5/8	1.3/8	1	0.15
1.00	1/2	5/8	7/8	1.7/8	1.1/4	0.33
1.75	5/8	3/4	1	2.1/4	1.1/2	0.61
2.50	3/4	7/8	1.1/4	2.3/4	1.3/4	0.93
3.50	7/8	1	1.3/8	3.1/4	2	1.80
4.50	1	1.1/8	1.1/2	3.5/8	2.1/4	2.15
5.50	1.1/8	1.1/4	1.3/4	4.1/8	2.1/2	3.02
7.00	1.1/4	1.3/8	1.7/8	4.1/2	2.3/4	4.20
8.00	1.3/8	1.1/2	2.1/8	5	3	5.34
10.75	1.1/2	1.3/4	2.3/8	5.1/2	3.1/2	8.36

IMPORTANT NOTICE

Please specify **Economy Range** each time you require them as it is our policy to supply our Quality Range as standard.